


# FLO-Drum MBR

FD-MBR

Pre-Treatment Screen

## Specifications

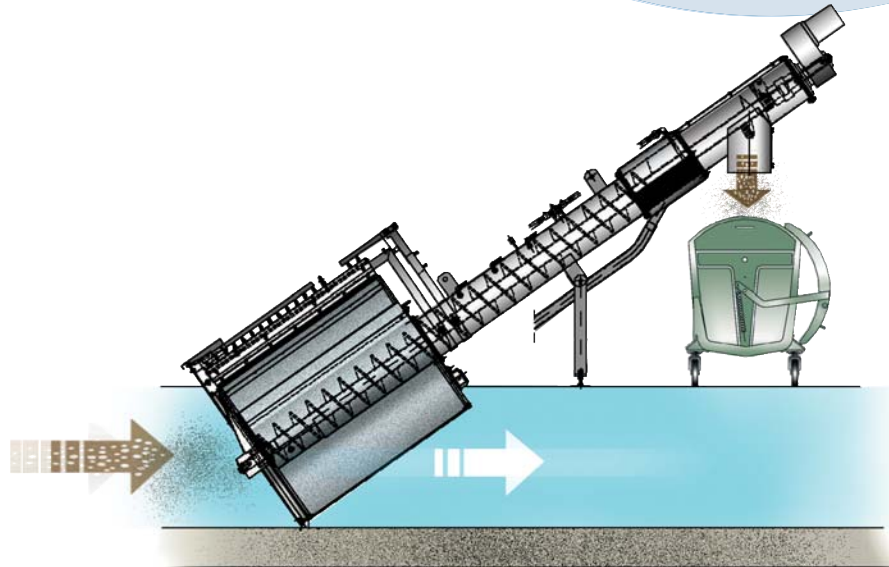

## Specifications

Flow rate	mgd	1 – 30
Channel widths	inches	26 – 118
Opening for MBR applications	mm perforated media	1 – 2 - 3
Angle of inclination		35°
Drum screen OD	mm	600 – 800 – 1000 – 1200 – 1400 1600 – 2000 – 2400 – 2600 - 3000
Drive motor	Hp	1 – 1.5 – 2 - 3
Controls		NEMA 4X/7
Voltage	V-Hz	240/480 V – 60 Hz

## Materials of Construction

Shafted screw	ST52-3 Alloy Steel (304/316 SST Optional)
Supports, End Plates, Anti-rotation bars	AISI 304 SST (316 Optional)
Tubes and Discharge Chutes	AISI 304 SST (316 Optional)

Technical information subject to change without notice.

Enviro-Care is the exclusive licensee for SAVI S.R.L. technologies in North America.